


HANDY TIPS

- Always use a metal tape measure.
- Remember to round off your measurements to the nearest millimeter.
- Measure twice - for accuracy!
- Look out for things like window/ door handles, frames or tiles and take their position into account if necessary.
- All our blinds can be fitted into the INSIDE of your window frame or wall (INSIDE MOUNT) or into the top of the architrave (OUTSIDE MOUNT).

MOUNTING STYLES

INSIDE MOUNT

Inside mounts are mounted on the inside of the architrave, for a more finished look.

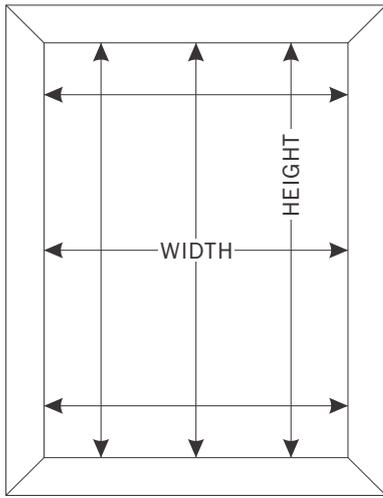

- **INSIDE mount:**
TAKE THE ACTUAL WINDOW OPENING SIZE.
Do not make any deductions. We will make the proper allowances to ensure that your blinds fit perfectly.


Measure:

1) **WIDTH.** Three locations.

LEFT, MIDDLE, RIGHT. Select the narrowest measurement. DO NOT MAKE ANY DEDUCTIONS.

2) **DROP.** Measure in three locations.

TOP, CENTRE, BOTTOM. Select the narrowest measurement.

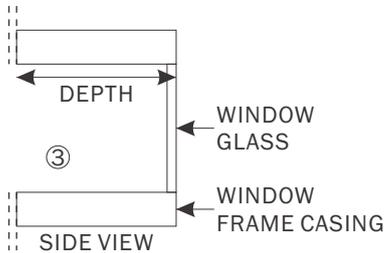


3) **DEPTH.**

Measure to ensure you have sufficient room for the window covering to fit **INSIDE** the reveal. Note obstructions such as door or window handles, frames and tiles. Refer next page for minimum DEPTH requirements.

OUTSIDE MOUNT

Outside mounts will make windows appear bigger and can be used to advantage to hide unattractive windows. The blind will affix to the architrave or wall itself.

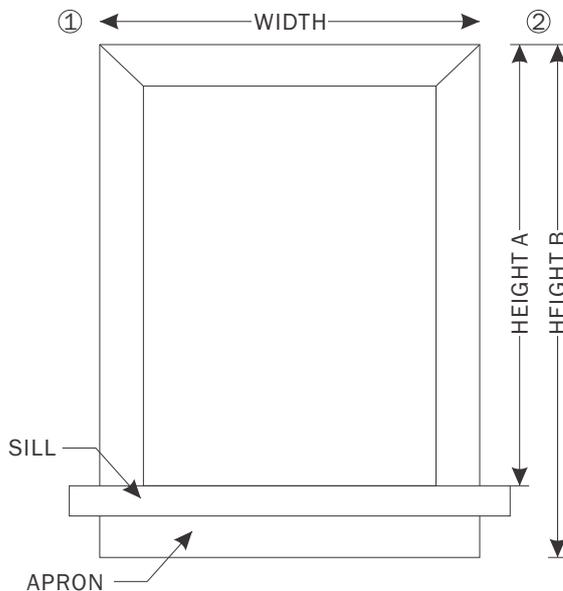

- Remember: when measuring for an **OUTSIDE** mount. TAKE THE WINDOW + ARCHITRAVE MEASUREMENTS.

Measure:

1) **WIDTH.** Measure the window + architrave width. LEFT TO RIGHT.

2) **DROP.** This can be measured in two locations.

Usually the most common preference is from top to bottom of architrave. (IE/ Height B)

a) From the top of the architrave to the window sill.

b) From the top of the architrave to the bottom of the window frame or architrave.